


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

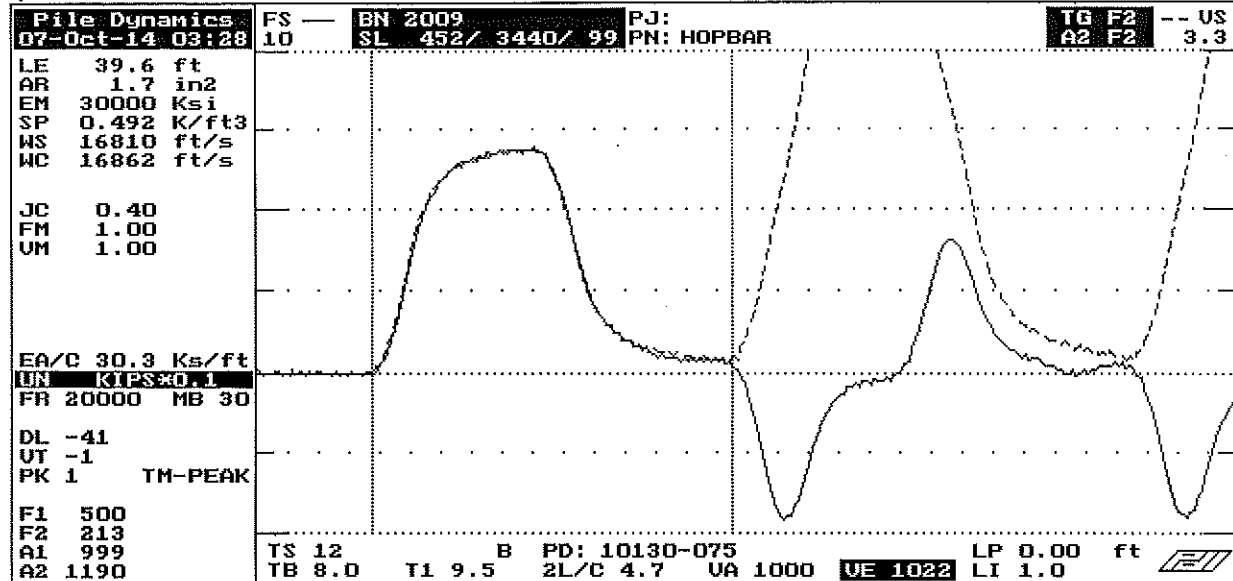

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA  
 with your questions  
 tel USA - 216 - 831- 6131  
 fax USA - 216 - 831- 0916

&lt;-AT:PIEZORESISTIVE

VMX= 4.5 FMX= 70 AMX= 139  
 EMX= 0.3 MEX= 137 FVP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10130

CALIBRATION FACTOR: 1190 g/v

PAK (\*5000): DATE: 7 OCT 14

PDA OPERATOR: M. Wang

OP: laine lver:4.051

&gt;AT:PIEZOELECTRIC-&gt;