


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

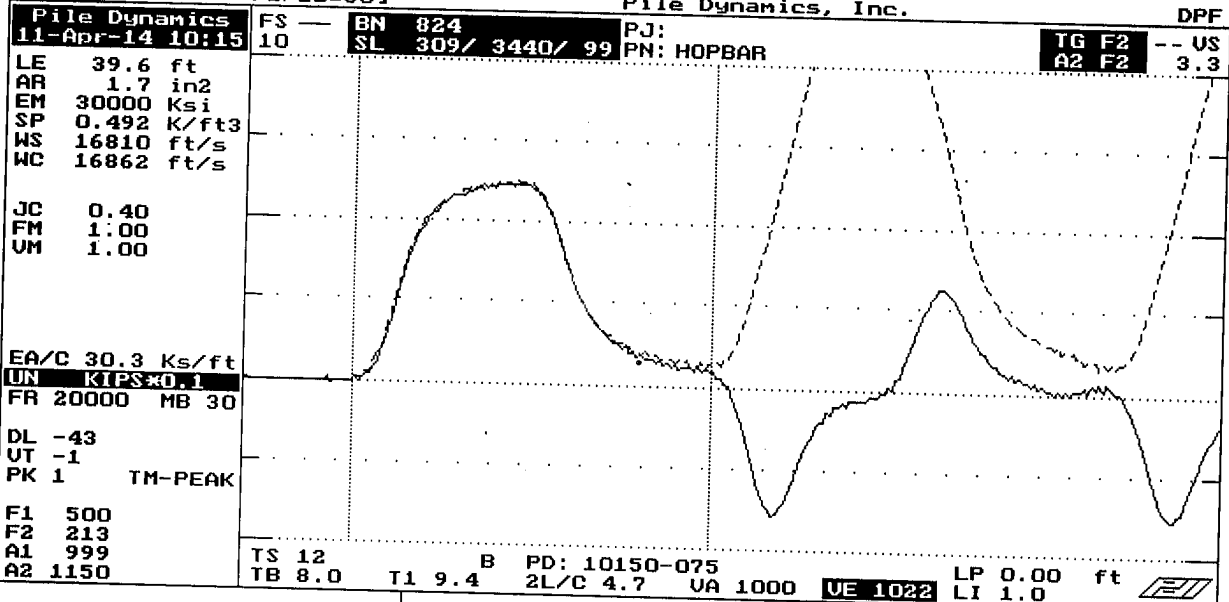

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

UMX= 4.1 FMX= 62 AMX= 129
EMX= 0.2 MEX= 121 FVP= 1.00

ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER: 10150

CALIBRATION FACTOR: 1150 G/v

RAK (*5000): DATE: 11-Apr-14

PDA OPERATOR: Erik S. [Signature]

OP: erik [ver:4.05]

>AT:PIEZOELECTRIC<