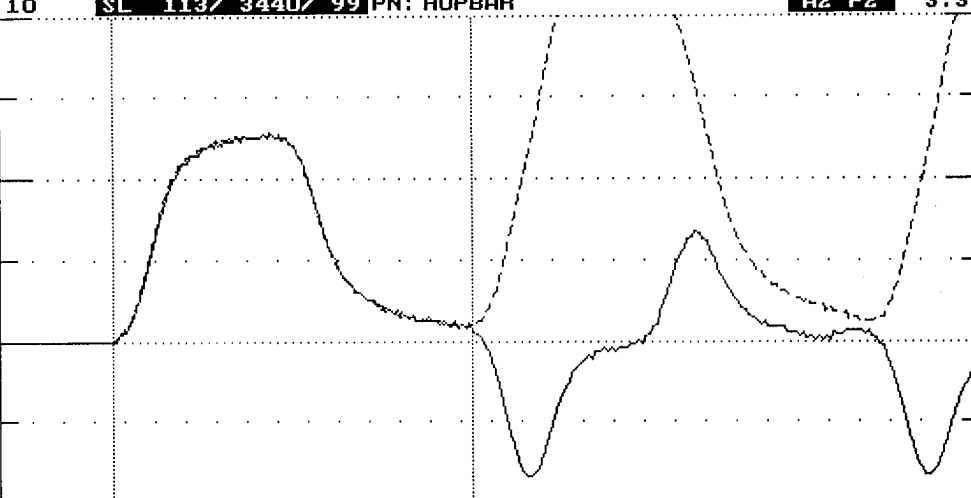


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 22-Apr-14 07:58		FS —	BN 21	PJ:	TG F2 -- US
		10	SL 113/ 3440/ 99	PN: HOPBAR	A2 F2 3.3
LE	39.6 ft				
AR	1.7 in2				
EM	30000 Ksi				
SP	0.492 K/ft3				
WS	16810 ft/s				
WC	16862 ft/s				
JC	0.40				
FM	1.00				
UM	1.00				
EA/C	30.3 Ks/ft				
UN	KIPS*0.1				
FR	20000 MB 30				
DL	-40				
UT	-1				
PK	1 TM-PEAK				
F1	500				
F2	213				
A1	999				
A2	1145				
TS	12	B	PD: 10158-075	LP	0.00 ft
TB	8.0	T1	9.4	2L/C	4.7
		VA	1000	VE	1022
		LI	1.0		

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.1 FMX= 65 AMX= 129
EMX= 0.3 MEX= 127 FVP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10158

CALIBRATION FACTOR: 1145 G/v

RAK (*5000): DATE: 22-Apr-14

PDA OPERATOR: Erik S. [Signature]

<-AT:PIEZORESISTIVE

OP: erik [ver:4.05]

AT:PIEZOELECTRIC->