


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

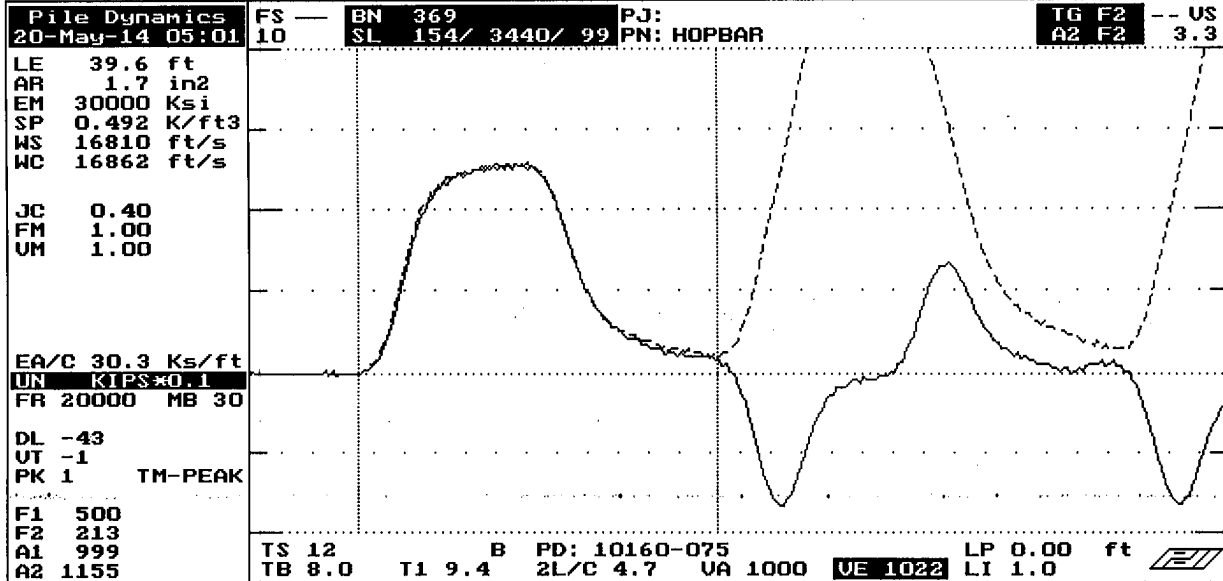

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.2 FMX= 65 AMX= 139
EMX= 0.3 MEX= 127 FVP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10160

CALIBRATION FACTOR: 1155 G/v

BAK(*5000): DATE: 20-May-14

PDA OPERATOR: Erik Iver

OP: erik Iver [4.05]

AT:PIEZOELECTRIC->