


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

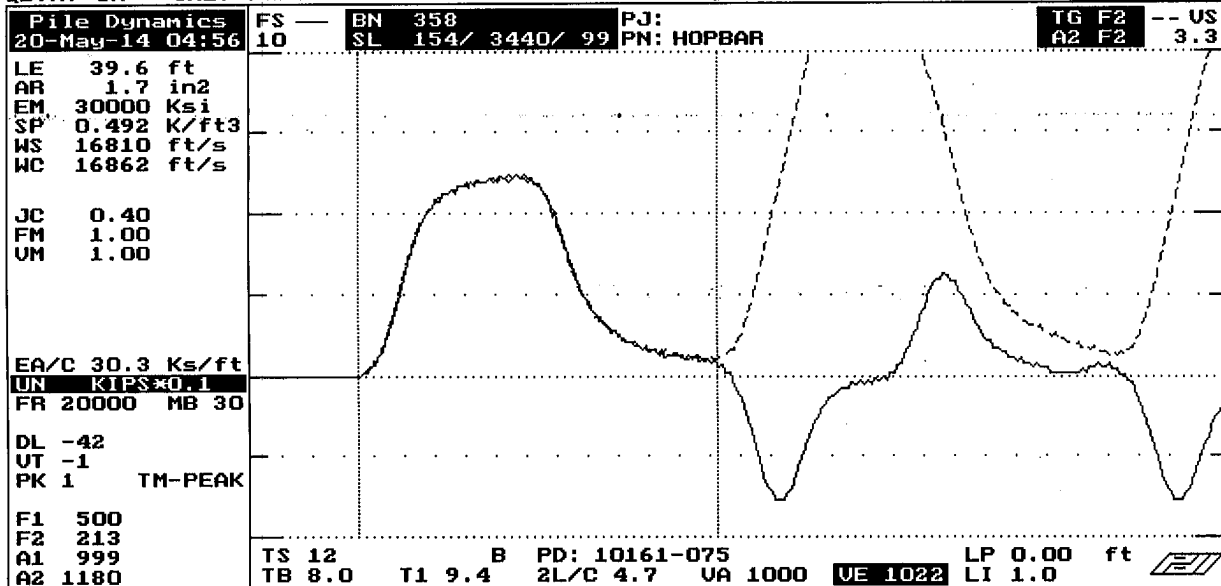

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA  
with your questions  
tel USA - 216 - 831- 6131  
fax USA - 216 - 831- 0916

&lt;-AT:PIEZORESISTIVE

VMX= 4.0 FMX= 62 AMX= 120  
EMX= 0.2 MEX= 121 FVP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10161

CALIBRATION FACTOR: 1180 G/v

PAK(\*5000): DATE: 20-May-14

PDA OPERATOR: Erik S.

OP: erik [ver:4.05]

AT:PIEZOELECTRIC-&gt;