


QBTA: ON [ALT-F1/BB=601

Pile Dynamics, Inc.

DPF

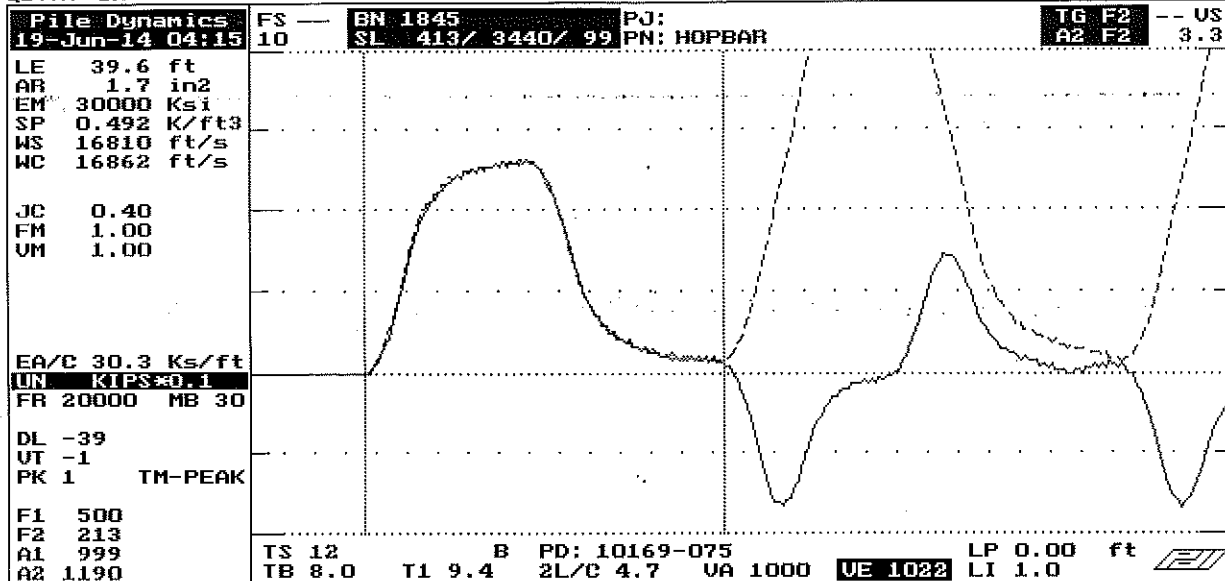

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.2 FMX= 66 AMX= 129
EMX= 0.3 MEX= 129 FVP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10169

CALIBRATION FACTOR: 1190 %

PAK (*5000): DATE: 19JUNE/14

PDA OPERATOR: M. Wright

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->