


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

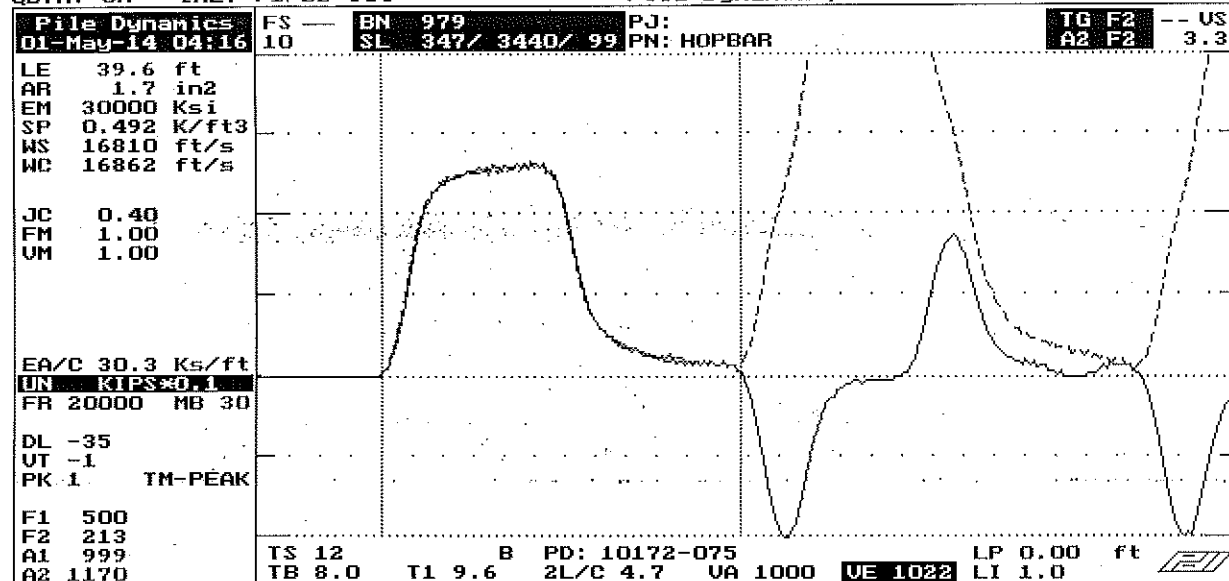

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.2 FMX= 66 AMX= 159
 EMX= 0.3 MEX= 129 FVP= 1.01

ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER: 10172

CALIBRATION FACTOR: 1170 %

PAK (*5000):

DATE: 1 MAY 14

PDA OPERATOR: M. Wang

OP: laine lver:4.051

>AT:PIEZOELECTRIC<