


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

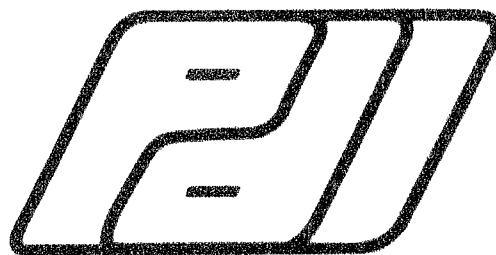

Serial No: K6143 Temperature: 22.3 °C

Model: KICHER PR Humidity: 39%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR

407.6 mv/5000g

(81.5 μ v/g)

R²: 0.999982 [Chip programmed]

Ref Acc 1: 85363! Cal on: 14Nov2025
1000 g's/volt

Ref Acc 2: 85382! Cal on: 24Nov2025
958 g's/volt


Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Operator: William Johnson

Signed

Calibration valid 2 years

From: 26Sep2026

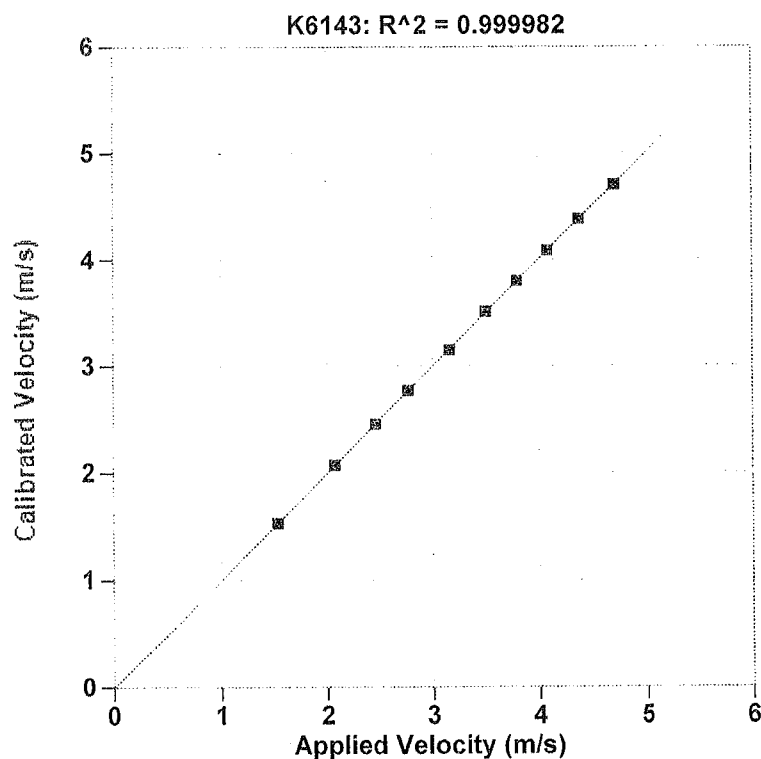

Reference Velocity	S/N K6143 Velocity
m/s	m/s
1.534	1.534
2.071	2.073
2.463	2.454
2.771	2.769
3.157	3.152
3.501	3.507
3.797	3.801
4.084	4.082
4.381	4.383
4.701	4.702
Maximum Acceleration: 1020 g's	