

File Dynamics 2018-02-22 11:28	FS — 10	BN 591 SL 644/ 3440/ 99	PJ: PN: HOPBAR	TG F2 -- US A2 F2 3.3
-----------------------------------	------------	----------------------------	-------------------	--------------------------


LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7312 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -39
VT -1 IP 0.00
PK 1 TM-PEAK

F1 500
F2 213
A1 220
A2 1170

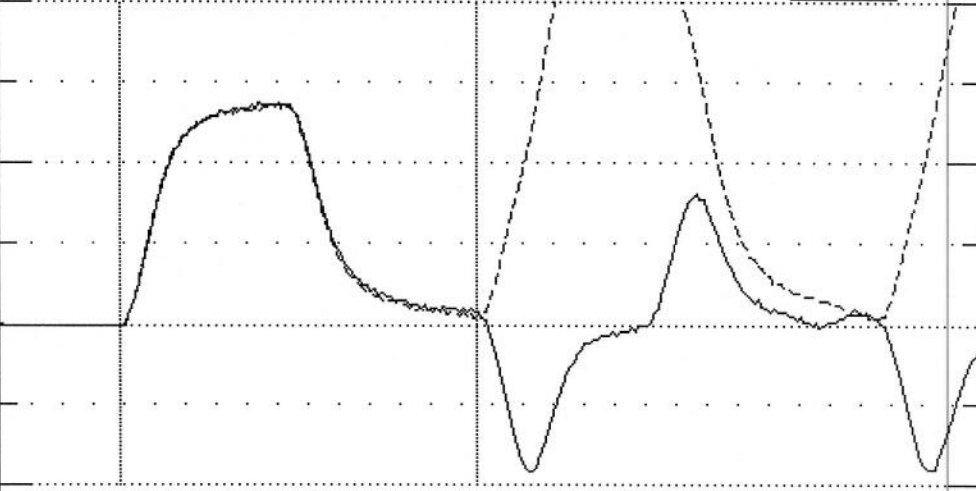

TS 12 B PD: 45611-075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1024 LI 1.0

UMX= 4.4 FMX= 69 AMX= 139
EMX= 0.3 MEX= 135 FVP= 1.00

ACCEPT SQ-OFF FL-OFF PR-OFF



ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 45611
CALIBRATION FACTOR: 1170 g/v
PAK (*5000): DATE: 22 Feb 18
PDA OPERATOR: [Signature]