



# Certificate of Calibration

Pile Dynamics, Inc.

Transducer Model: PDI Strain Transducer

Serial Number: Z548


PDI Gage Factor: 92.2

Mean Linear Correlation Coefficient: 0.999944

Table 1: Representative Calibration Data

| Applied strain ( $\mu\text{E}$ ) | Gage Output (mV/Vexc) | Applied strain ( $\mu\text{E}$ ) | Gage Output (mV/Vexc) |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| -1870.1                          | -5.812                | 472.4                            | 1.577                 |
| -1384.5                          | -4.258                | 853.0                            | 2.769                 |
| -925.2                           | -2.824                | 1161.4                           | 3.754                 |
| -511.8                           | -1.501                | 1463.3                           | 4.691                 |
| -203.4                           | -0.521                | 1778.2                           | 5.633                 |
| 91.9                             | 0.400                 | 2001.3                           | 6.293                 |

Calibration Curve

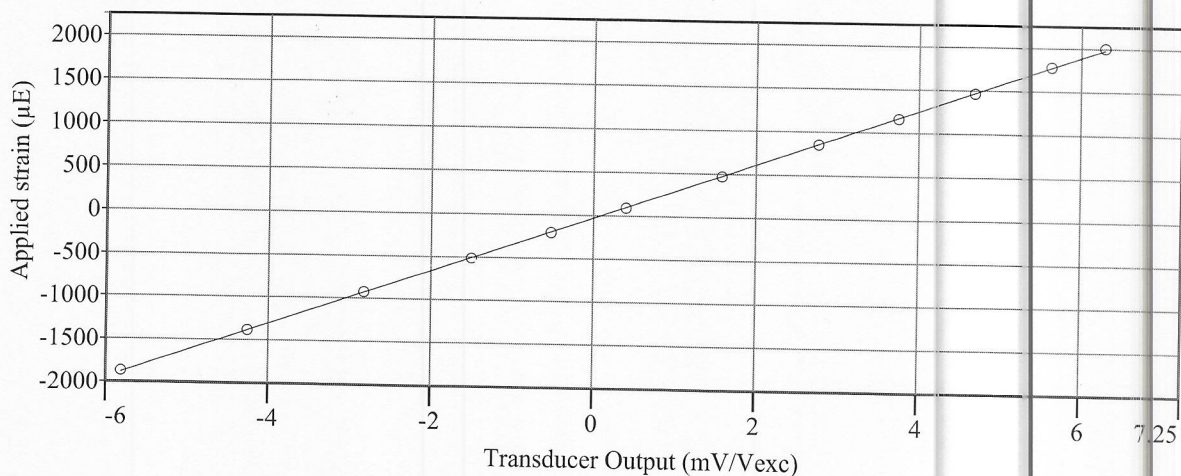

PDI Strain Transducer Calibration System (PDI STCS)

|                                     |                   |
|-------------------------------------|-------------------|
| PDI STCS Serial Number:             | 1000HA            |
| Firmware version number:            | 0.9.0.0           |
| Transducer Gage Length:             | 3 inches (76.2mm) |
| Excitation Voltage for Calibration: | 5.0 VDC           |

PDI certifies the above STCS instrument meets or exceeds published specifications and has been verified using standards and instruments whose accuracies are traceable to the National Institute of Standards and Technology (NIST), an accepted value of a natural physical constant or a ratio calibration technique.

Calibrated By: VANNA OUK

Signature: \_\_\_\_\_

PDI Gage: Z548

MAR 20 2024

Calibration Date: \_\_\_\_\_

