



Certificate of Calibration

TechSense

Transducer Model: PDI Strain Transducer

Serial Number: X170


PDI Gage Factor: 92.9

Mean Linear Correlation Coefficient: 0.999961

Table 1: Representative Calibration Data

Applied strain (μE)	Gage Output (mV/Vexc)	Applied strain (μE)	Gage Output (mV/Vexc)
-1864.4	-6.077	594.6	1.904
-1409.7	-4.657	934.1	3.008
-1153.9	-3.839	1169.2	3.751
-805.5	-2.702	1474.3	4.737
-478.0	-1.633	1680.9	5.409
-154.3	-0.566	1950.7	6.246
281.2	0.859		

Calibration Curve

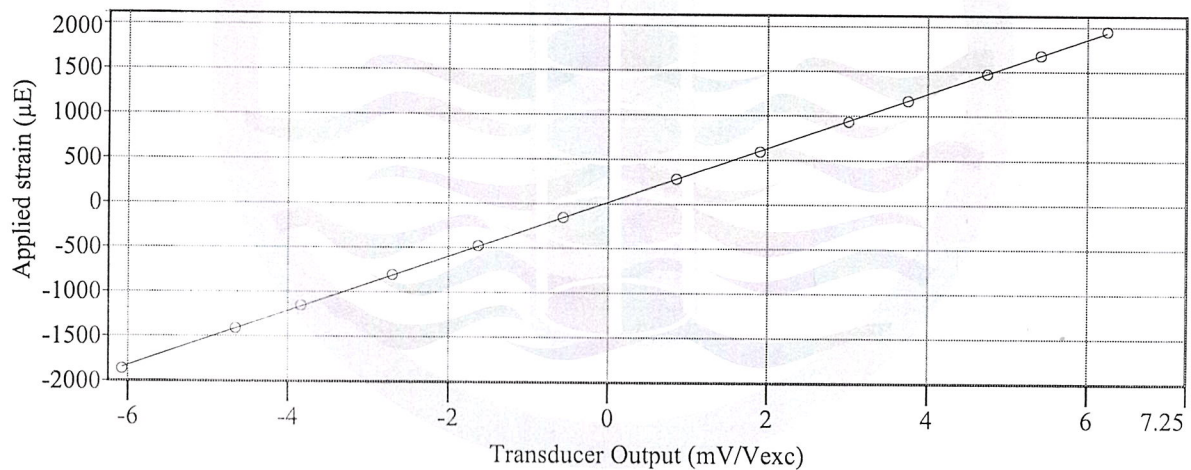

PDI Strain Transducer Calibration System (PDI STCS)

PDI STCS Serial Number:	1003HA
Firmware version number:	0.9.0.0
Transducer Gage Length:	3 inches (76.2mm)
Excitation Voltage for Calibration:	5.0 VDC


PDI certifies the above STCS instrument meets or exceeds published specifications and has been verified using standards and instruments whose accuracies are traceable to the National Institute of Standards and Technology (NIST), an accepted value of a natural physical constant or a ratio calibration technique.

Calibrated By: RASENDU PATEL

Signature: _____

PDI Gage: X170

Calibration Date: 04-03-2024 17:54:14

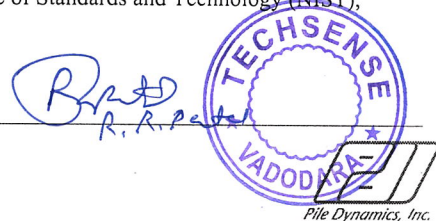

TechSense

49, Atmajyoti Nagar Society, Near Atmajyoti Ashram, Ellora Park, Vadodra - 390023
Website : www.techsenseindia.com E-mail : info@techsenseindia.com
Mobile.: +91- 8905510013 / +91 9327226069