




Certificate of Calibration

Pile Dynamics, Inc.
 Transducer Model: PDI Strain Transducer
 Serial Number: 239C
 PDI Gage Factor: 146.8
 Mean Linear Correlation Coefficient: 0.999813

Table 1: Representative Calibration Data

| Applied strain (μE) | Gage Output (mV/Vexc) | Applied strain (μE) | Gage Output (mV/Vexc) |
|----------------------------|-----------------------|----------------------------|-----------------------|
| -2099.7 | -4.219 | 695.5 | 1.372 |
| -1522.3 | -3.051 | 1030.2 | 2.015 |
| -964.6 | -1.931 | 1371.4 | 2.663 |
| -492.1 | -0.976 | 1719.2 | 3.312 |
| -170.6 | -0.354 | 2007.9 | 3.849 |
| 295.3 | 0.582 | | |

Calibration Curve

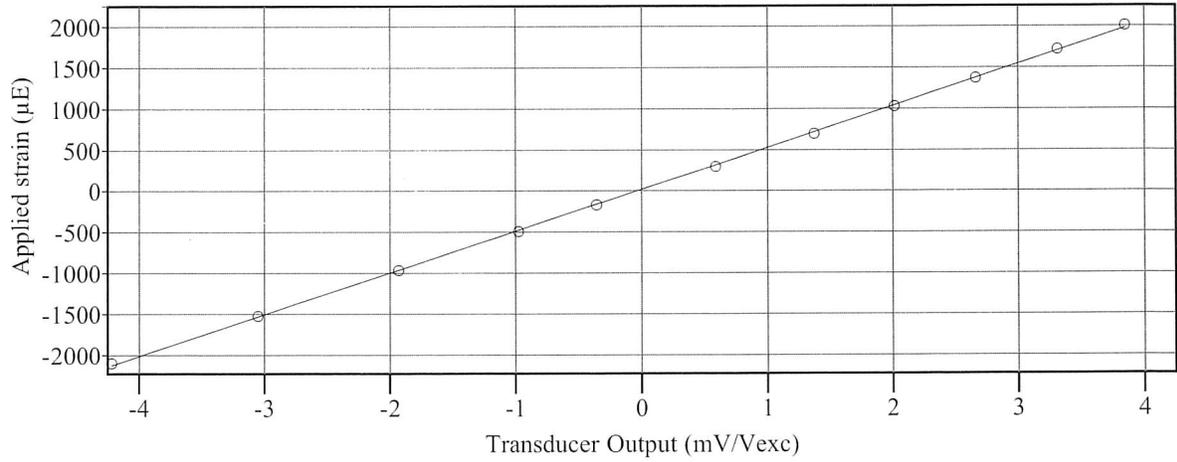

PDI Strain Transducer Calibration System (PDI STCS)

| | |
|-------------------------------------|-------------------|
| PDI STCS Serial Number: | 1000HA |
| Firmware version number: | 0.9.0.0 |
| Transducer Gage Length: | 3 inches (76.2mm) |
| Excitation Voltage for Calibration: | 5.0 VDC |

PDI certifies the above STCS instrument meets or exceeds published specifications and has been verified using standards and instruments whose accuracies are traceable to the National Institute of Standards and Technology (NIST), an accepted value of a natural physical constant or a ratio calibration technique.

Calibrated By: Kelly Beal
 PDI Gage: 239C
 Calibration Date: _____

Signature:

FEB 26 2026

